

# KK FILM

## Main Applications:

- ◆ For cold and hot fusing of appliqués.


## Processing Recommendations:

### Application with self-adhesive film:

1. Stick KK FILM to the reverse side of the appliqué and press firmly (calender, Welger wood).
2. Cut out the appliqué, by hand, laser or cutting plotter.
3. Remove backing paper.
4. Place the appliqué with the adhesive side on the the base fabric or foil SOLVY 80.
5. Finish embroidering the appliqué with satin stitch edge.

### Application for thermal fixation:

1. Glue KK FILM to the back of the appliqué fabric. Press the fabric with the ironing press or iron the fabric.
  - Temperature: 100 - 120 degrees Celsius
  - Pressure: 4 bar
  - Duration: 5 - 10 s
2. Cut out the appliqué, by hand, laser or cutting plotter.
3. Remove backing paper.
4. Fix the appliqué with the adhesive side to the the base fabric or foil SOLVY 80.
5. Finish embroidering the appliqué with satin stitch edge.

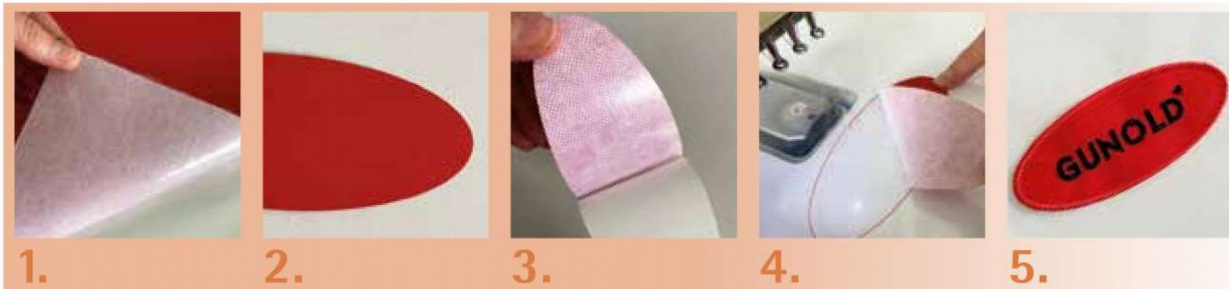

## Technical Information:

### ◆ Material:

Double-sided, self-adhesive film, additionally heat activatable  
100% polyacrylat

Adhesive: water-based polyacrylate.  
Solvent-free, ageing-resistant and permanently elastic

Cover: white silicone paper

- ◆ **Weight:** Adhesive: 15 g/m<sup>2</sup>  
Silicone paper: 93 g/m<sup>2</sup>

- ◆ **Colour:** transparent

### ◆ Make-up:

Rolls 100 cm x 25 m  
50 cm x 25 m

### ◆ Minimum order:

1 roll



Professional materials for high-quality embroidery results – tried and tested in the clothing, promotion and home textile industries. For more information visit our website [www.gunold.de](http://www.gunold.de)!

# ROTHENBORG ApS

GUDUMKÆRVEJ 6 · DK-7400 HERNING

TEL. +45 97 15 63 33 · FAX +45 97 25 15 75

WWW.ROTHENBORG.DK · E-MAIL: MAIL@ROTHENBORG.DK

GUNOLD GmbH · Obernburger Str. 125 · D-63811 Stockstadt · Tel.: +49 (0) 6027 2008-0 · Fax: +49 (0) 6027 3772 · email: service@gunold.de · www.gunold.de

# GUNOLD®

